


Portautensile VDI per utensili a forare

Portautensile VDI per utensili **a forare** forma E1, secondo DIN 69880 con refrigerazione interna.

DIN
69880

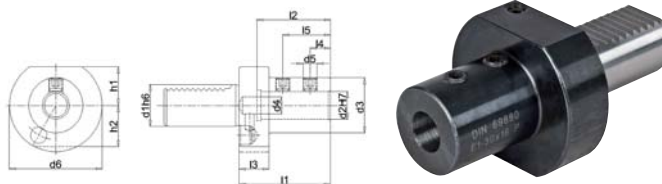

C45180	Tipo (E1/VDI)	d1 (mm)	h1 (mm)	d2 (mm)	d6 (mm)	d3 (mm)	l1 (mm)	l3 (mm)	l2 (mm)	€
C451803006	30*	30	28	6	68	25	50	22	36	---
C451803008	30*	30	28	8	68	28	50	22	36	---
C451803010	30*	30	28	10	68	35	54	22	40	---
C451803012	30*	30	28	12	68	42	59	22	45	---
C451803016	30	30	28	16	68	36	67	22	54	---
C451803020	30	30	28	20	68	40	67	22	54	---
C451803025	30	30	28	25	68	45	71	22	58	---
C451803032	30	30	28	32	68	52	75	22	61	---
C451803040	30	30	28	40	68	65	90	22	72	---
C451804006	40*	40	32,5	6	83	25	50	22	36	---
C451804008	40*	40	32,5	8	83	28	50	22	36	---
C451804010	40*	40	32,5	10	83	35	54	22	40	---
C451804012	40*	40	32,5	12	83	42	58	22	45	---
C451804016	40	40	32,5	16	83	36	67	22	54	---
C451804020	40	40	32,5	20	83	40	67	22	54	---
C451804025	40	40	32,5	25	83	45	75	22	59	---


*Attacco Whistle Notch.

C45180	Tipo (E1/VDI)	d1 (mm)	h1 (mm)	d2 (mm)	d6 (mm)	d3 (mm)	l1 (mm)	l3 (mm)	l2 (mm)	€
C451804032	40	40	32,5	32	83	52	75	22	61	---
C451804040	40	40	32,5	40	83	65	90	22	73	---
C451804050	40	40	32,5	50	83	70	100	22	83	---
C451805016	50	50	35	16	98	36	80	30	54	---
C451805020	50	50	35	20	98	40	80	30	54	---
C451805025	50	50	35	25	98	45	80	30	59	---
C451805032	50	50	35	32	98	52	80	30	63	---
C451805040	50	50	35	40	98	65	90	30	73	---
C451805050	50	50	35	50	98	75	100	30	83	---
C451806016	60	60	42,5	16	123	36	80	30	54	---
C451806020	60	60	42,5	20	123	40	80	30	54	---
C451806025	60	60	42,5	25	123	45	80	30	59	---
C451806032	60	60	42,5	32	123	52	80	30	63	---
C451806040	60	60	42,5	40	123	65	90	30	73	---
C451806050	60	60	42,5	50	123	75	100	30	83	---

Portautensile VDI per barenì

Portautensile **VDI per barenì** forma E2, secondo DIN 69880, con uscita refrigerante esterna.

DIN
69880

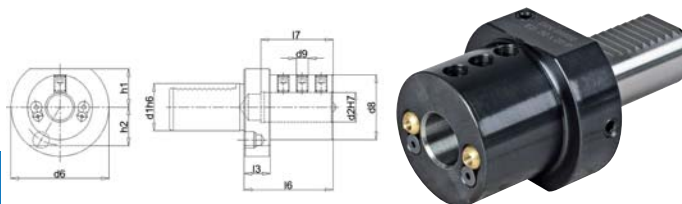


C45181	Tipo (E2/VDI)	d1 (mm)	h1 (mm)	d2 (mm)	d6 (mm)	d8 (mm)	l1 (mm)	l3 (mm)	l6 (mm)	€
C451813006	30	30	28	6	68	55	60	22	43	---
C451813008	30	30	28	8	68	55	60	22	43	---
C451813010	30	30	28	10	68	55	60	22	43	---
C451813012	30	30	28	12	68	55	60	22	43	---
C451813016	30	30	28	16	68	55	60	22	55	---
C451813020	30	30	28	20	68	55	60	22	54	---
C451813025	30	30	28	25	68	55	60	22	54	---
C451813032	30	30	28	32	68	67	75	22	61	---
C451813040	30	30	28	40	68	67	75	22	66	---
C451814006	40	40	32,5	6	83	55	75	22	43	---
C451814008	40	40	32,5	8	83	55	75	22	43	---
C451814010	40	40	32,5	10	83	55	75	22	43	---
C451814012	40	40	32,5	12	83	55	75	22	58	---
C451814016	40	40	32,5	16	83	55	75	22	61	---
C451814020	40	40	32,5	20	83	55	75	22	61	---
C451814025	40	40	32,5	25	83	55	75	22	61	---

C45181	Tipo (E2/VDI)	d1 (mm)	h1 (mm)	d2 (mm)	d6 (mm)	d8 (mm)	l1 (mm)	l3 (mm)	l6 (mm)	€
C451814032	40	40	32,5	32	83	82	75	22	61	---
C451814040	40	40	32,5	40	83	82	90	22	76	---
C451814050	40	40	35	50	98	98	100	-	86	---
C451815012	50	50	35	12	98	68	90	30	71	---
C451815016	50	50	35	16	98	68	90	30	76	---
C451815020	50	50	35	20	98	68	90	30	76	---
C451815025	50	50	35	25	98	68	90	30	76	---
C451815032	50	50	35	32	98	69	90	30	76	---
C451815040	50	50	35	40	98	98	90	-	76	---
C451815050	50	50	35	50	98	98	100	-	86	---
C451816016	60	60	42,5	16	123	68	90	30	76	---
C451816020	60	60	42,5	20	123	68	90	30	76	---
C451816025	60	60	42,5	25	123	68	90	30	76	---
C451816032	60	60	42,5	32	123	68	90	30	76	---
C451816040	60	60	42,5	40	123	98	90	30	76	---
C451816050	60	60	42,5	50	123	98	100	30	86	---

Portautensile VDI per pinze secondo DIN 6499/B tipo ER/EX

Portautensile **VDI per pinza ER** secondo DIN 6499/B forma E4, secondo DIN 69880.

DIN
69880

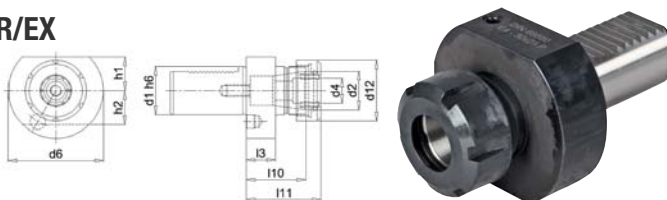

C45188	Tipo (E4/VDI)	d1 (mm)	h1 (mm)	d2 (mm)	d6 (mm)	d12 (mm)	l1 (mm)	l3 (mm)	Pinza ER	€
C451883010	30	30	28	1-10	68	32	48	22	16	---
C451883016	30	30	28	2-16	68	42	57	22	25	---
C451883020	30	30	28	2-20	68	50	78	22	32	---
C451883030	30	30	28	3-30	68	63	80	22	40	---
C451884016	40	40	32,5	2-16	83	42	57	22	25	---
C451884020	40	40	32,5	2-20	83	50	78	22	32	---

C45188	Tipo (E4/VDI)	d1 (mm)	h1 (mm)	d2 (mm)	d6 (mm)	d12 (mm)	l1 (mm)	l3 (mm)	Pinza ER	€
C451884030	40	40	32,5	3-30	83	63	80	22	40	---
C451885016	50	50	35	2-16	98	42	67	30	25	---
C451885020	50	50	35	2-20	98	50	92	30	32	---
C451885030	50	50	35	3-30	98	63	80	30	40	---
C451886020	60	60	42,5	2-20	123	50	78	30	32	---
C451886030	60	60	42,5	3-30	123	63	80	30	40	---