




Fresa ad inserti per smussi

Fresa ad inserti per smussi, attacco a manicotto, con passaggio interno del lubrificante, per esecuzione di smussi con angoli diversi (γ°) in contornatura. Consigliato l'utilizzo su macchine con una buona rigidità.



A58105	€	Dimensioni							
		γ°	D (mm)	D1 (mm)	d (H7) (mm)	L (mm)	H (mm)	N° eliche	Z
A581050015	---	15	35	94	27	50	8	3	6
A581050020	---	20	35	91	27	50	10	3	6
A581050030	---	30	35	88	27	50	15	3	6
A581050040	---	40	35	84	27	50	19	3	6
A581050045	---	45	35	77,8	27	50	21,5	3	6
A581050050	---	50	35	73	27	50	23	3	6
A581050060	---	60	35	65	27	50	26,5	3	6
A581050075	---	75	35	50,7	22	60	29,5	3	6


Ricambi		
		
Inserto	Vite	Giravite
APHT APHX APKT 1604	A91 035 0035	A55 925 0090

Inserti: vedi pag. 368/369/370/371.



Fresa ad inserti per lamatura a 180°

Fresa ad inserti per lamatura a 180° monotagliante, attacco cilindrico weldon, con passaggio interno del lubrificante.

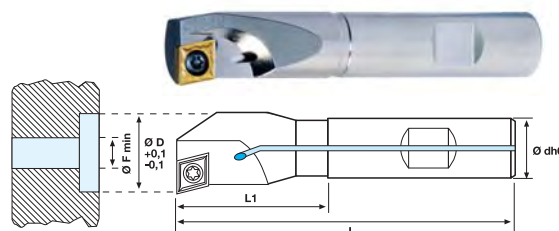

A58110	€	Dimensioni				
		Ø D (mm)	Ø F min (mm)	L (mm)	L1 (mm)	Ø d (h6) (mm)
A581100010	---	10	4	85	15	12
A581100011	---	11	4	85	15	12
A581100012	---	12	4	85	18	12
A581100013	---	13	5	85	23	12
A581100014	---	14	5	85	23	12
A581100015	---	15	5	85	30	12
A581100016	---	16	5	85	30	12
A581100017	---	17	6	95	30	16
A581100018	---	18	6	95	40	16
A581100019	---	19	6	95	40	16
A581100020	---	20	5	95	40	16
A581100021	---	21	5	95	42	16
A581100022	---	22	6	95	42	16
A581100023	---	23	6	95	42	16
A581100024	---	24	6	95	42	16
A581100025	---	25	8	95	42	16
A581100026	---	26	8	120	56	20
A581100027	---	27	8	120	56	20
A581100028	---	28	10	120	56	20
A581100029	---	29	10	120	56	20
A581100030	---	30	10	120	56	20
A581100031	---	31	12	120	56	20
A581100032	---	32	12	120	56	20
A581100033	---	33	12	120	56	20

Ricambi		
		
Inserto	Vite	Giravite
CCMT 060204	A91 035 0015	A55 925 0070
CCMT 09T304	A91 035 0035	A55 925 0090

Inserti: vedi pag. 368/369/370/371.