



## Portainsero per gole e scanalatura interna

Portainsero per gole e scanalatura interna con fissaggio a staffa con vite.

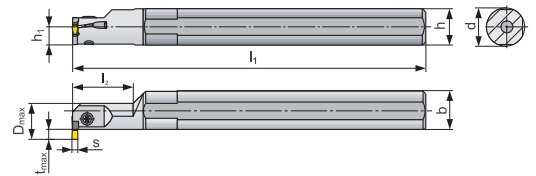

Ricambi		
Inserto	Vite	Giravite
LCMF 1304	A509694170	N202350150

Inserti: vedi pag. 418.

Codice	€	Tipo	Dimensioni								
			d (mm)	h (mm)	h1 (mm)	b (mm)	l1 (mm)	l2 (mm)	s (mm)	t max (mm)	ø D max (mm)
A608254130	286,85	A25S-GGFR 0413	25	23	11,5	24	250	40	4	7,5	25
A608254135	286,85	A25S-GGFL 0413	25	23	11,5	24	250	40	4	7,5	25
A608254140	351,60	A32T-GGHR 0413	32	30	15	31	300	50	4	10,5	32
A608254145	351,60	A32T-GGHL 0413	32	30	15	31	300	50	4	10,5	32

## Inserto in metallo duro per scanalatura interna

Inserto in metallo duro per operazioni di scanalatura interna di acciai legati e non, acciaio inossidabile e ghisa.



LCMF-13F



LCMF-13MO

Codice	€	Pz.	Tipo	Spessore inserto (mm)							
					P	M	K	N	S	H	
A569694300	16,50	10	LCMF 130304-F U 9035	3	Vc m/min.	110-250	65-150	100-235	-	-	-
					f mm/U.	0,05-0,25	0,05-0,19	0,05-0,25	-	-	-
					ap/mm	0,3-3	0,3-2,3	0,3-3	-	-	-
A569694310	17,10	10	LCMF 1303MO-MP U 9035	3	Vc m/min.	160-325	95-195	150-305	-	-	-
					f mm/U.	0,05-0,3	0,05-0,23	0,05-0,3	-	-	-
					ap/mm	0,5-1,5	0,5-1,1	0,5-1,5	-	-	-
A569694305	16,90	10	LCMF 130404-F U 9035	4	Vc m/min.	110-235	65-140	100-220	-	-	-
					f mm/U.	0,05-0,25	0,05-0,19	0,05-0,25	-	-	-
					ap/mm	0,5-3	0,5-2,3	0,5-3	-	-	-
A569694315	17,10	10	LCMF 1304MO-MP U 9035	4	Vc m/min.	145-325	85-195	135-305	-	-	-
					f mm/U.	0,05-0,35	0,05-0,26	0,05-0,35	-	-	-
					ap/mm	0,5-2	0,5-1,5	0,5-2	-	-	-

## Inserto in metallo duro per troncatura e scanalatura

Inserto in metallo duro per operazioni di troncatura e scanalatura di acciai, acciaio inossidabile e ghisa.



LCMF-16F



LCMF-16MO

Codice	€	Pz.	Tipo	Spessore inserto (mm)							
					P	M	K	N	S	H	
A569694320	16,50	10	LCMF 160304-F U 9035	3	Vc m/min.	130-250	75-150	120-235	-	-	-
					f mm/U.	0,05-0,17	0,05-0,13	0,05-0,17	-	-	-
					ap/mm	0,3-3	0,3-2,3	0,3-3	-	-	-
A569694323	16,50	10	LCMF 1603MO-MP U 9035	3	Vc m/min.	130-250	75-150	120-235	-	-	-
					f mm/U.	0,05-0,17	0,05-0,13	0,05-0,17	-	-	-
					ap/mm	0,3-3	0,3-2,3	0,3-3	-	-	-
A569694325	16,90	10	LCMF 160404-F U 9035	4	Vc m/min.	110-220	65-120	100-190	-	-	-
					f mm/U.	0,08-0,25	0,08-0,19	0,08-0,25	-	-	-
					ap/mm	0,5-3	0,5-2,3	0,5-3	-	-	-
A569694330	16,90	10	LCMF 1604MO-MP U 9035	4	Vc m/min.	130-240	75-140	120-225	-	-	-
					f mm/U.	0,08-0,25	0,08-0,19	0,08-0,25	-	-	-
					ap/mm	0,5-3	0,5-2,3	0,5-3	-	-	-