




### Ugello filettato per getti universali

Ugello filettato da utilizzare su tutti i tipi di getti universali filettati, materiale ottone, **pressione massima di esercizio 33 bar**. Temperatura massima 150 °C.

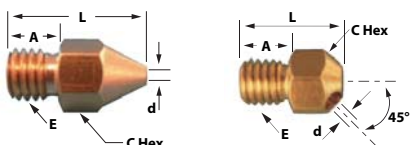


Codice	€	E (M/NPT")	d (mm)	L (mm)	A (mm)	C Hex (")	Tipo ugello
U035000005	◆	3,5x0,6	1,6	10,7	3,6	3/16	diritto
U035000010	◆	3,5x0,6	2,2	10,7	3,6	3/16	diritto
U035000015	◆	4x0,7	1,6	13,7	4,6	3/16	diritto
U035000020	◆	4x0,7	2,2	13,7	4,6	3/16	diritto
U035000025	◆	5x0,8	1,6	16	5,3	1/4	diritto
U035000030	◆	5x0,8	2,2	16	5,3	1/4	diritto
U035000035	◆	5x0,8	3	16	5,3	1/4	diritto
U035000040	◆	6x1	1,6	16	5,3	1/4	diritto
U035000045	◆	6x1	2,2	16	5,3	1/4	diritto
U035000050	◆	6x1	3	16	5,3	1/4	diritto
U035000055	◆	6x1	3,8	16	5,3	1/4	diritto
U035000060	◆	8x1,25	1,6	20,3	7,6	3/8	diritto
U035000065	◆	8x1,25	2,2	20,3	7,6	3/8	diritto
U035000070	◆	8x1,25	3	20,3	7,6	3/8	diritto

Codice	€	E (M/NPT")	d (mm)	L (mm)	A (mm)	C Hex (")	Tipo ugello
U035000075	◆	8x1,25	4	20,3	7,6	3/8	diritto
U035000080	◆	8x1,25	5,6	20,3	7,6	3/8	diritto
U035000085	◆	1/8	1,6	22,9	9,4	1/2	diritto
U035000090	◆	1/8	2,2	22,9	9,4	1/2	diritto
U035000095	◆	1/8	3	22,9	9,4	1/2	diritto
U035000100	◆	1/8	4	22,9	9,4	1/2	diritto
U035000105	◆	1/8	5,6	22,9	9,4	1/2	diritto
U035000110	◆	1/8	7,1	22,9	9,4	1/2	diritto
U035000115	◆	3,5x0,6	1,6	8,10	3,6	3/16	45°
U035000120	◆	4x0,7	1,6	9,15	4,6	3/16	45°
U035000125	◆	5x0,8	2,2	10,7	5,3	1/4	45°
U035000130	◆	6x1	2,2	10,7	5,3	1/4	45°
U035000135	◆	6x1	3	10,7	5,3	1/4	45°



### Tubo di prolunga filettato

Tubo rigido di prolunga con attacco filettato, materiale ottone, **pressione massima di esercizio 33 bar**. Temperatura massima 150 °C.




Codice	€	E (M)	L (mm)	d (mm)
U035500350	◆	3,5x0,6	30	2
U035500400	◆	4x0,7	35	2
U035500500	◆	5x0,8	40	3

Codice	€	E (M)	L (mm)	d (mm)
U035500600	◆	6x1	50	4
U035500700	◆	7x1	55	5
U035500800	◆	8x1,25	55	5,5



### Tubo di prolunga filettato

Tubo di prolunga con attacco filettato, **materiale del tubo rame ricotto** con **lunghezza 159 mm**, esagono filettato in bronzo, **pressione massima di esercizio 33 bar**. Temperatura massima 150 °C.



Codice	€	E (M)	d (mm)	A (mm)	C Hex (")
U036000350	◆	3,5x0,6	1,8	3,2	3/16
U036000400	◆	4x0,7	1,8	3,2	1/4
U036000500	◆	5x0,8	3	4,8	1/4

Codice	€	E (M)	d (mm)	A (mm)	C Hex (")
U036000600	◆	6x1	3	4,8	1/4
U036000700	◆	7x1	4,6	6,35	5/16
U036000800	◆	8x1,25	4,6	6,35	5/16