


Portainserito per tornitura esterna 95°

Portainserito per tornitura esterna con fissaggio a leva per inserto negativo norma ISO, per lavorazioni di tornitura e sfacciatura.

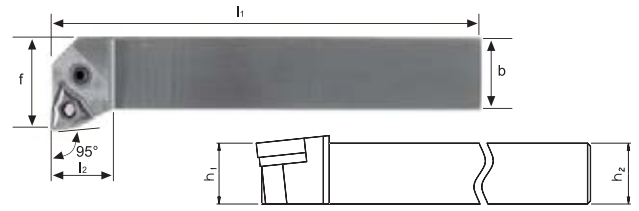

Codice	€	ISO	Dimensioni					
			h1 (mm)	h2 (mm)	b (mm)	l1 (mm)	l2 (mm)	f (mm)
A622050122	◆	PWLN 2020 K08	20	20	20	125	25	25
A622050127	◆	PWLN 2525 M08	25	25	25	150	25	32
A622050132	◆	PWLN 3225 P08	32	32	25	170	25	32
A622050222	◆	PWLN 2020 K08	20	20	20	125	25	25
A622050227	◆	PWLN 2525 M08	25	25	25	150	25	32
A622050232	◆	PWLN 3225 P08	32	32	25	170	25	32

Ricambi					
Inserto	Sottopiacchetta	Leva	Vite	Spina	Punzone
WNMG 0804	A915250005	A915400005	A915000005	A915300005	A915350005

Ricambi: vedi pag. 523/524/525/526.

Codice	€	Pz.	Foto	Denominazione	Figura	Dimensioni (mm)					Classi metallo duro															
						l	d	s	d1	r	Non rivestiti		Rivestiti					Cermet								
											NK 15	NP 25	RP 200	RP 300	RK 300	RK 400	KTP 230		TIN	TIALN	CX 55					
A935600555	◆	10		WNMG 080408 NN		8,7	12,7	4,76	5,16	0,8																

Tabella materiali e parametri di utilizzo consigliati vedi pag. 418/419/420/421.