





← Pagina precedente

Codice	€	Pz.	Tipo	a ± 0,06 (mm)	b (mm)	r (mm)	Angolo libero	K	P	M	K	N	S	H	
A573400090	7,30	◇	10	LFMX 2.00-0.16SR12 MU 9035	2	1,6	0,16	-	12°	Vc m/min.	-	-	-	-	-
										f mm/U.	0,05-0,12	0,05-0,12	0,05-0,12	-	-
A573400095	7,30	◇	10	LFMX 2.00-0.16SL12 MU 9035	2	1,6	0,16	-	12°	Vc m/min.	-	-	-	-	-
										f mm/U.	0,05-0,12	0,05-0,12	0,05-0,12	-	-
A573400033	7,10	◇	10	LFMX 3.10-0.20SR8 MU 9035	3,1	2,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,2	0,07-0,15	0,07-0,2	0,07-0,2	0,07-0,12
A573400035	7,10	◇	10	LFMX 3.10-0.20SL8 MU 9035	3,1	2,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,2	0,07-0,15	0,07-0,2	0,07-0,2	0,07-0,12
A573400053	7,10	◇	10	LFMX 4.10-0.20SR8 MU 9035	4,1	3,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,25	0,07-0,19	0,07-0,25	0,07-0,25	0,07-0,15
A573400055	7,80	◇	10	LFMX 4.10-0.20SL8 MU 9035	4,1	3,6	0,2	-	8°	Vc m/min.	95-180	55-105	90-170	140-630	15-50
										f mm/U.	0,07-0,25	0,07-0,19	0,07-0,25	0,07-0,25	0,07-0,15



Portainsero per troncatura e scanalatura esterna

Portainsero per troncatura e scanalatura esterna con fissaggio a staffa con vite.

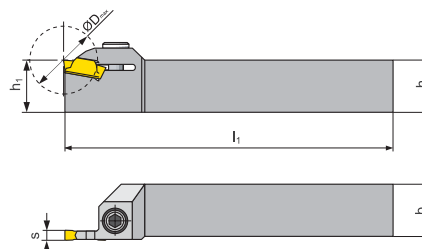

Codice	€	Tipo	Dimensioni				
			Dimensione attacco (mm)	b (mm)	L1 (mm)	S (mm)	ø D max (mm)
A608204000	137,75	◇ GFIR 1616 H03	16x16	16	100	3	18
A608204005	137,75	◇ GFIR 1616 H03	16x16	16	100	3	18
A608204030	137,75	◇ GFIR 1616 H04	16x16	16	100	4	24
A608204035	137,75	◇ GFIR 1616 H04	16x16	16	100	4	24
A608204040	158,85	◇ GFIR 2020 K04	20x20	20	125	4	24
A608204045	158,85	◇ GFIR 2020 K04	20x20	20	125	4	24
A608204050	168,10	◇ GFIR 2525 M04	25x25	25	150	4	24
A608204055	168,10	◇ GFIR 2525 M04	25x25	25	150	4	24
A608204175	86,00	◇ GFIR 1616 H03	16x16	16	100	3	40
A608204180	86,00	◇ GFIR 1616 H03	16x16	16	100	3	40
A608204185	103,70	◇ GFIR 2020 K03	20x20	20	125	3	40
A608204190	103,70	◇ GFIR 2020 K03	20x20	20	125	3	40
A608204195	126,70	◇ GFIR 2525 M03	25x25	25	150	3	40
A608204200	126,70	◇ GFIR 2525 M03	25x25	25	150	3	40



Ricambi		
Inserto	Vite	Chiave
LCMF1603../M0	A509694070	N200050050
LCMF1604../M0	A509694075	
LCMF1603../M0	A509694070	

Inserti: vedi pag. 418.



Portainsero per gole e scanalatura interna

Portainsero per gole e scanalatura interna con fissaggio a staffa con vite.

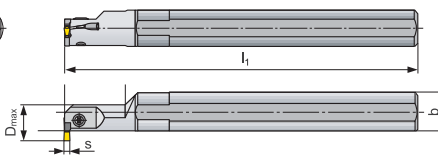

Codice	€	Tipo	Dimensioni				
			Dimensione attacco (mm)	b (mm)	L1 (mm)	S (mm)	ø D max (mm)
A608234235	162,85	◇ A20 N GFI-R	20x20	20	200	3	25
A608234240	162,85	◇ A20 N GFI-L	20x20	20	200	3	25
A608234245	167,80	◇ A25 N GFI-R	25x25	25	250	3	32
A608234250	167,80	◇ A25 N GFI-L	25x25	25	250	3	32
A608234255	231,60	◇ A32 R GFI-R	32x32	32	300	3	40
A608234260	231,60	◇ A32 R GFI-L	32x32	32	300	3	40

Ricambi		
Inserto	Vite	Giravite
LCMF 1603	A509694170	N202350150

Inserti: vedi pag. 418.